

Phone: 941-757-3696 Info@wfhinspect.com www.wfhinspect.com

Wind Mitigation Inspection

Fairway Trace II

4211 Caddie Dr E Bradenton FL, 34203

12/02/2021



Note to Policyholder:

Questions regarding the results of this inspection should be directed to a member of our Quality Assurance team by dialing the number listed above, or by simply emailing us at info@wfhinspect.com

Questions regarding the impact of this inspection and your insurance coverage or premiums should be directed to either your trusted insurance agent or your insurance carrier.

Limitation of Liability: West Florida Home Inspections, LLC inspections are purely observational in nature and based upon the accessible areas of the structure as well as any available documentation provided to the inspector during the time of inspection. West Florida Home Inspections, LLC is solely verifying the presence or lack thereof of mitigation features associated with the form, and makes no warranty, express or implied, regarding the suitablity or condition of the structure under any circumstances.

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 12/02/2021								
Owner Information								
Owner Na	me: Fairway Trace II	Contact Person:	Contact Person:					
Address: 4	211 Caddie Dr E			Home Phone:				
City: Brade	enton	Zip:	34203	Work Phone:				
County: I	Manatee			Cell Phone: 12/02/2021	I			
Insurance				Policy #:				
Year of Ho	^{ome:} 1991	# of Stories: 2	# of Stories: 2		Email: rmaxfield@amiwra.com			
NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.								
the HV A. a d B. pro C. 2. Roof C	 Building Code: Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)? A. Built in compliance with the FBC: Year Built For homes built in 2002/2003 provide a permit application with a date after 3/1/2002: Building Permit Application Date (MM/DD/YYYY)//							
		Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance			
	1. Asphalt/Fiberglass Shingle	419 11						
	2. Concrete/Clay Tile							
Г	3. Metal							
F	4. Built Up							
F	- · · · · · · · · · · · · · · · · · · ·							
	- -							
L	6. Other							
ins B. roo	A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B".							
3. Roof D	Deck Attachment : What is th	e weakest form of roof de	ck attachment?					
A. by shi me B. 24 oth ma C. 24 dee	A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.							
	ny system of screws, nails, ac s Initials <u>DB</u> Property Addi	i		Bradenton	o nave an equivalent			
inspectors.	roperty Audi							

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 $Page\ 1\ of\ 4$

	or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance								
	П	182 psf. D. Reinford	82 psr. Reinforced Concrete Roof Deck.						
	Ħ		ner:						
			nown or unidentified.						
		G. No attic	No attic access.						
4.		of to Wall Attachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within tet of the inside or outside corner of the roof in determination of WEAKEST type) A. Toe Nails							
			Truss/rafter anchored to top plate of wall using nails drive the top plate of the wall, or	ven at an angle through the truss/rafter and attached to					
			Metal connectors that do not meet the minimal conditions	or requirements of B, C, or D					
	Miı	nimal conditi	ons to qualify for categories B, C, or D. All visible metal	connectors are:					
									
		2	Attached to the wall top plate of the wall framing, or embthe blocking or truss/rafter and blocked no more than 1.5° corrosion.						
	Ш	B. Clips	Maria and the state of the stat	- l - C					
		片	Metal connectors that do not wrap over the top of the trus. Metal connectors with a minimum of 1 strap that wraps o						
		C. Sinala V	position requirements of C or D, but is secured with a mir						
		C. Single W	Metal connectors consisting of a single strap that wraps minimum of 2 nails on the front side and a minimum of 1						
	D. Double Wraps								
			Metal Connectors consisting of 2 separate straps that are a beam, on either side of the truss/rafter where each strap w a minimum of 2 nails on the front side, and a minimum of	raps over the top of the truss/rafter and is secured with					
			Metal connectors consisting of a single strap that wraps or both sides, and is secured to the top plate with a minimum						
	닏	E. Structura	3	crete roof.					
	F. Other:								
	G. Unknown or unidentified								
	H. No attic access								
5.	Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).								
		A. Hip Roo							
	П	B. Flat Roo	Total length of non-hip features: feet; Total reaction Roof on a building with 5 or more units where at least						
	_		less than 2:12. Roof area with slope less than 2:12	sq ft; Total roof areasq ft					
		C. Other Ro	of Any roof that does not qualify as either (A) or (B) about	ove.					
6.	Sec	 Secondary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss. B. No SWR. C. Unknown or undetermined. 							
In	spec	etors Initials	Property Address 4211 Caddie Dr E	Bradenton					
*T	his '		orm is valid for up to five (5) years provided no material	changes have been made to the structure or					

Ispects and West Florida Home Inspections LLC | 239-896-3986 | 941-757-3696 | Info@Ispects.me

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

Page 2 of 4

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable. Non-Glazed **Opening Protection Level Chart Glazed Openings Openings** Place an "X" in each row to identify all forms of protection in use for each Windows opening type. Check only one answer below (A thru X), based on the weakest Glass Entry Garage Garage or Entry Skylights form of protection (lowest row) for any of the Glazed openings and indicate **Doors Block** Doors **Doors** Doors the weakest form of protection (lowest row) for Non-Glazed openings. Not Applicable- there are no openings of this type on the structure Α Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights) В Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights) С Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007 Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E D 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance Opening Protection products that appear to be A or B but are not verified Ν Other protective coverings that cannot be identified as A, B, or C Х No Windborne Debris Protection A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above). Miami-Dade County PA 201, 202, and 203 Florida Building Code Testing Application Standard (TAS) 201, 202, and 203 American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996 Southern Standards Technical Document (SSTD) 12 For Skylights Only: ASTM E 1886 and ASTM E 1996 For Garage Doors Only: ANSI/DASMA 115 A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above): ASTM E 1886 and ASTM E 1996 (Large Missile – 4.5 lb.) SSTD 12 (Large Missile – 4 lb. to 8 lb.) For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.) B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above). C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above C.3 One or More Non-Glazed openings is classified as Level N or X in the table above Bradenton Inspectors Initials DB Property Address 4211 Caddie Dr E

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

Page 3 of 4


N. Exterior Opening Protection (unverified shutted protective coverings not meeting the requirements of with no documentation of compliance (Level N in the content of the compliance of the content of t	of Answer "A", "F					
<u> </u>	· · · · · · · · · · · · · · · · · · ·	ahaan ahaa Nan Claasi	Lamaninas anist			
 N.1 All Non-Glazed openings classified as Level A, B, N.2 One or More Non-Glazed openings classified as Letable above 						
N.3 One or More Non-Glazed openings is classified as	Level X in the table	e above				
X. None or Some Glazed Openings One or more C			n the table above.			
MITIGATION INSPECTIONS MUS Section 627.711(2), Florida Statutes, p		~				
Qualified Inspector Name: Dustin Beres	License Type:	d Home Inspector	License or Certificate #:			
Inspection Company: West Florida Home Inspections	State Licenset	Phone Phone Phone				
	es es (check or		11) 131 0000			
 Qualified Inspector – I hold an active license as a: (check one) Home inspector licensed under Section 468.8314, Florida Statutes who has completed the statutory number of hours of hurricane mitigation training approved by the Construction Industry Licensing Board and completion of a proficiency exam. Building code inspector certified under Section 468.607, Florida Statutes. 						
General, building or residential contractor licensed under Se		ida Statutes.				
Professional engineer licensed under Section 471.015, Florid						
Professional architect licensed under Section 481.213, Florid						
Any other individual or entity recognized by the insurer as p	Any other individual or entity recognized by the insurer as possessing the necessary qualifications to properly complete a uniform mitigation verification form pursuant to Section 627.711(2), Florida Statutes.					
Individuals other than licensed contractors licensed ununder Section 471.015, Florida Statutes, must inspect the Licensees under s.471.015 or s.489.111 may authorize a experience to conduct a mitigation verification inspection. I, Dustin Beres am a qualified inspect (print name) contractors and professional engineers only) I had my enamed I agree to be responsible for his/her work.	he structures per direct employee on. tor and I persona	sonally and not through who possesses the requirement the inspection of the inspecti	gh employees or other persons. quisite skill, knowledge, and pection or (licensed form the inspection			
Qualified Inspector Signature:	_	12/02/2 Date:	2021			
An individual or entity who knowingly or through gros subject to investigation by the Florida Division of Insurappropriate licensing agency or to criminal prosecution certifies this form shall be directly liable for the miscon performed the inspection.	rance Fraud and n. (Section 627.71	vides a false or fraudu may be subject to adn 11(4)-(7), Florida Statu	ninistrative action by the ites) The Qualified Inspector who			
Homeowner to complete: I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative.						
Signature:	Date:	12/02/2021				
An individual or entity who knowingly provides or utte obtain or receive a discount on an insurance premium to of the first degree. (Section 627.711(7), Florida Statutes	to which the indi					
The definitions on this form are for inspection purposes as offering protection from hurricanes.	s only and canno	t be used to certify an	y product or construction feature			
Inspectors Initials DB Property Address 4211 Cadd	die Dr E	Bra	adenton			
*This verification form is valid for up to five (5) years proceduracies found on the form	provided no mate	erial changes have bee	n made to the structure or			

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

Page 4 of 4



Front Elevation

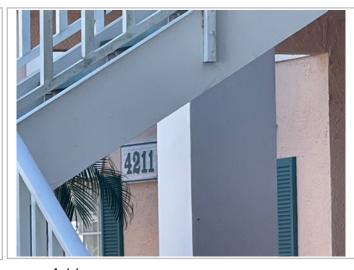

Address



Left Elevation



Right Elevation



Rear Elevation



Rear Elevation



Roof Covering





Strap- Anchor Side



Strap- Opposing Side



Spacing 8d Nails

